




Elevator rope 8x19S-FC

Product information

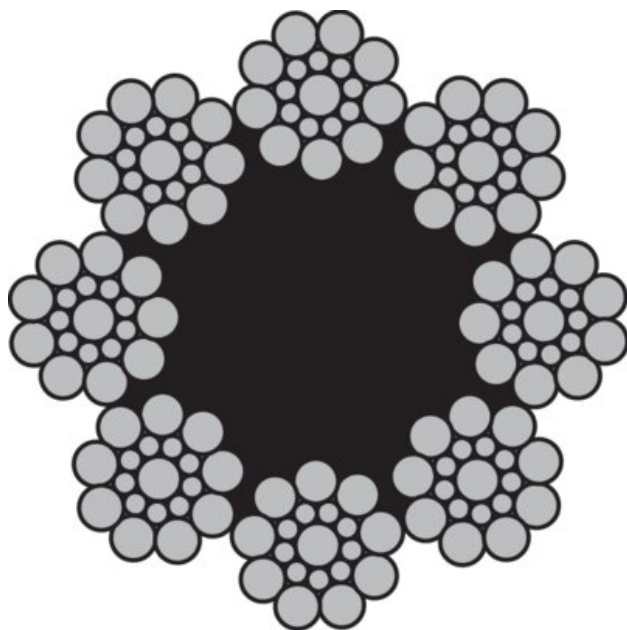

General: Steel wire rope for use in elevator.

Tolerance: ≤10 mm 0% – +6%, 10 mm 0% – +5%.

Rope construction: 8x19S-FC, Seal.


Marking: According to standard

Finish: Ungalvanised.

Standard: EN 12385-5

Fill factor: 0.44

Elevator



Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m	Delivery time
106100804130209	8	1,370/1,770	Bright	sZ	28.1	22	SupplierStandard	22.2	3
106100904130209	9	1,370/1,770	Bright	sZ	35.6	28.3	SupplierStandard	28	7
106101004130209	10	1,370/1,770	Bright	sZ	44	34.9	SupplierStandard	34	3
106101104130209	11	1,370/1,770	Bright	sZ	53.2	42.2	SupplierStandard	41	3
106101204130209	12	1,370/1,770	Bright	sZ	63.3	50.3	SupplierStandard	49	3
106101304130209	13	1,370/1,770	Bright	sZ	74.3	59	SupplierStandard	58	7
106101404130209	14	1,370/1,770	Bright	sZ	86.1	68.4	SupplierStandard	67	7
106101504130209	15	1,370/1,770	Bright	sZ	98.9	78.5	SupplierStandard	77	7
106101604130209	16	1,370/1,770	Bright	sZ	113	89.3	SupplierStandard	87	7
106101904130209	19	1,370/1,770	Bright	sZ	159	126	SupplierStandard	123	7
106102204130209	22	1,370/1,770	Bright	sZ	213	169	SupplierStandard	165	7