



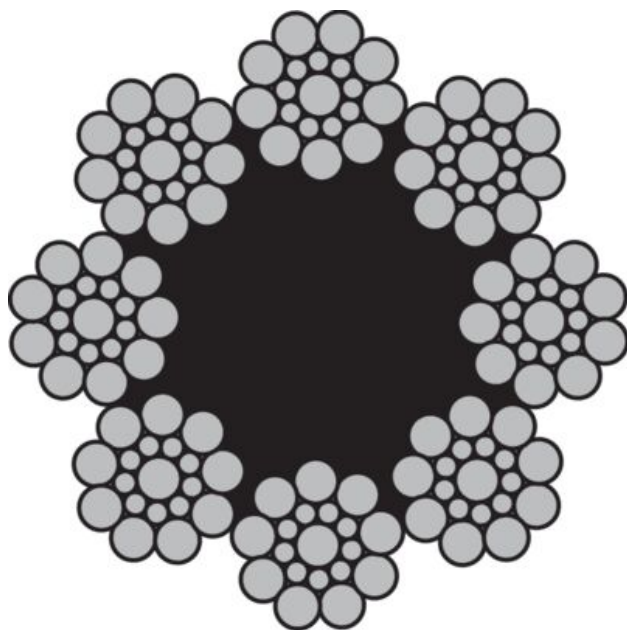

Elevator



Trulift 8F

Product information



Also available in Filler (12/6&6F/1) and Warrington (6&6/6/1) constructions.
Excellent stretch characteristics.

Features: High quality eight strand fibre core lift rope.

Marking: According to standard

Finish: Ungalvanised.

Standard: EN 12385-5

Fill factor: 0.44

Tolerance Ø: 0% to +6%

Part Code	Rope Diameter, mm	Steel area mm ²	Min. Breaking force kN. 1370/1770 N/mm ²	Weight kg/100m
106100804130079	8	22	28.1	22.2
106100904130079	9	28.3	35.6	28
106101004130079	10	34.9	44	34
106101104130079	11	42.2	53.2	41
106101204130079	12	50.3	63.3	49
106101304130079	13	59	74.3	58
106101404130079	14	68.4	86.1	67