



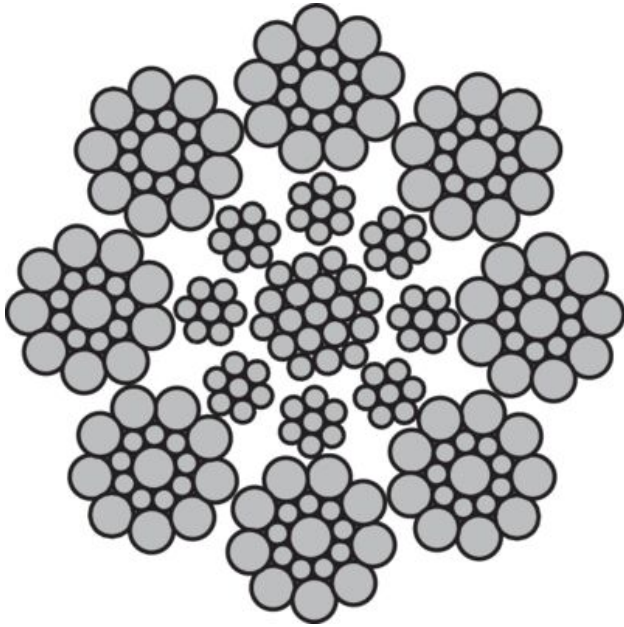

Elevator



Trulift 8S

Product information



Higher strength
Lower stretch
Uniform diameter
Good diameter retention
Improved fatigue performance

Tolerance more than 10 mm: 0% - +5%

Tolerance less than 10 mm: 0% - +6%

Features: High quality steel core lift rope

Material: High Carbon Steel

Marking: According to standard, On Termination ID and CE mark

Finish: Ungalvanised

Standard: EN 12385-5

Fill factor: 0.59

Part Code	Rope Diameter, mm	Steel area mm ²	Min. Breaking force kN. 1570 N/mm ²	Weight kg/100m
106100904020089	9	38.1	48	34
106101004020089	10	46.6	58.5	41
106101104020089	11	55.6	69.7	49
106101204020089	12	66.4	83.6	59
106101304020089	13	79.5	100	70
106101404020089	14	91.8	116	81
106101504020089	15	104	131	92
106101604020089	16	118	148	105