




Steel Wire Rope 35x7 (Rotation resistant)

Product information

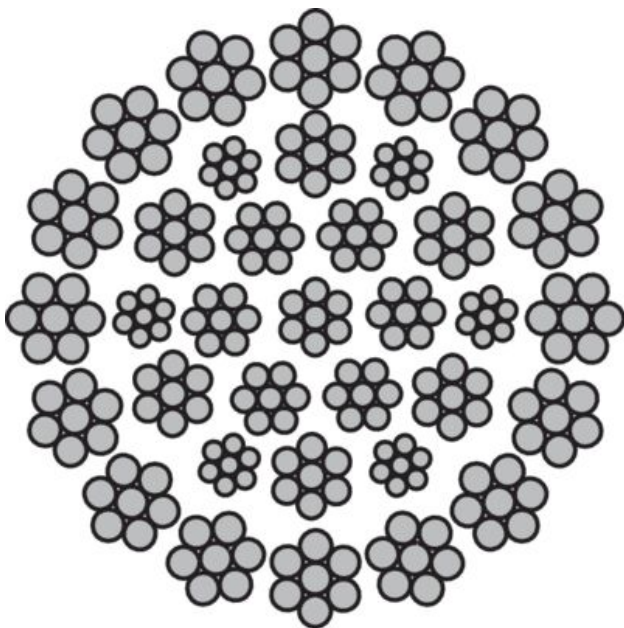

Typical applications: Hoist rope for tower cranes, mobile cranes, electrical hoists and other applications where rotation resistant rope is required.

Design: Right hand ordinary lay.

ISO 4309 Rope Category No: All Diameters **RCN.23-2**

Rope construction: Rotation resistant, made out of conventional strands.

Marking: According to standard

Finish: Galvanized.

Standard: EN 12385-4

Note: Can be used with a swivel.

Fill factor: 0.61

RCN: 23-2

Part Code	Rope Diameter, mm	Steel area mm ²	Min. Breaking force kN. 1960 N/mm ²	Weight kg/100m
102100806270091	8	30.7	45.2	29
102100906270091	9	38.9	57.2	37
102101006270091	10	48	70.6	45
102101206270091	12	69.1	102	65
102101306270091	13	81.1	119	77
102101406270091	14	94.1	138	89
102101506270091	15	108	159	102
102101606270091	16	123	181	116
102101706270091	17	139	204	131
102101806270091	18	156	229	147
102101906270091	19	173	255	164
102102006270091	20	192	282	182
102102106270091	21	212	311	200
102102206270091	22	232	342	220
102102306270091	23	254	373	240
102102406270091	24	276	406	262
102102606270091	26	324	477	307
102102806270091	28	376	553	356
102103006270091	30	432	635	409
102103206270091	32	492	723	465