




Steel Wire Rope 35x7 (Rotation resistant)

Product information

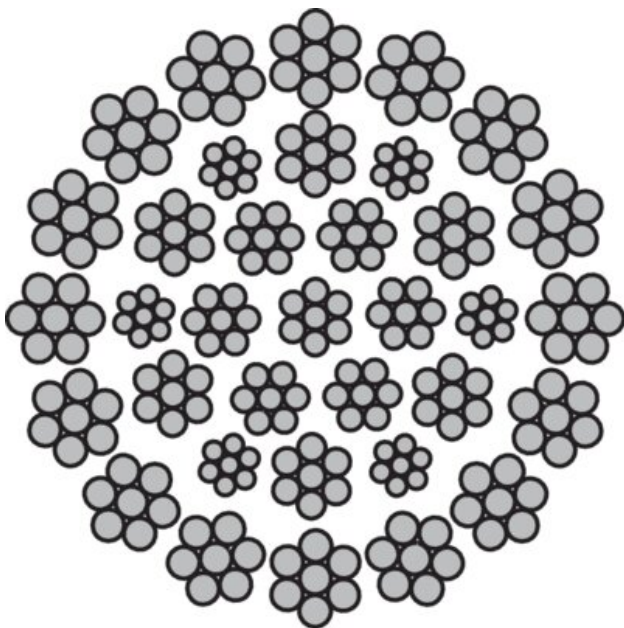

Typical applications: Hoist rope for tower cranes, mobile cranes, electrical hoists and other applications where rotation resistant rope is required.

Design: Right hand ordinary lay.

ISO 4309 Rope Category No: All Diameters **RCN.23-2**

Rope construction: Rotation resistant, made out of conventional strands.

Marking: According to standard

Finish: Galvanized.

Standard: EN 12385-4

Note: Can be used with a swivel.

Fill factor: 0.61

RCN: 23-2

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m	Delivery time
102100806270091	8	1,960	Galvanized	zZ	45.2	30.7	A-1	29	7
102100906270091	9	1,960	Galvanized	zZ	57.2	38.9	A-1	37	7
102101006270091	10	1,960	Galvanized	zZ	70.6	48	A-1	45	7
102101206270091	12	1,960	Galvanized	zZ	102	69.1	A-1	65	7
102101306270091	13	1,960	Galvanized	zZ	119	81.1	A-1	77	7
102101406270091	14	1,960	Galvanized	zZ	138	94.1	A-1	89	7
102101506270091	15	1,960	Galvanized	zZ	159	108	A-1	102	7
102101606270091	16	1,960	Galvanized	zZ	181	123	A-1	116	7
102101706270091	17	1,960	Galvanized	zZ	204	139	A-1	131	7
102101806270091	18	1,960	Galvanized	zZ	229	156	A-1	147	7
102101906270091	19	1,960	Galvanized	zZ	255	173	A-1	164	7
102102006270091	20	1,960	Galvanized	zZ	282	192	A-1	182	7
102102106270091	21	1,960	Galvanized	zZ	311	212	A-1	200	7
102102206270091	22	1,960	Galvanized	zZ	342	232	A-1	220	7
102102306270091	23	1,960	Galvanized	zZ	373	254	A-1	240	7
102102406270091	24	1,960	Galvanized	zZ	406	276	A-1	262	7
102102606270091	26	1,960	Galvanized	zZ	477	324	A-1	307	7
102102806270091	28	1,960	Galvanized	zZ	553	376	A-1	356	7
102103006270091	30	1,960	Galvanized	zZ	635	432	A-1	409	7
102103206270091	32	1,960	Galvanized	zZ	723	492	A-1	465	7