

Lifting Solutions Group
Axel Johnson International

Stratoplast

Product information

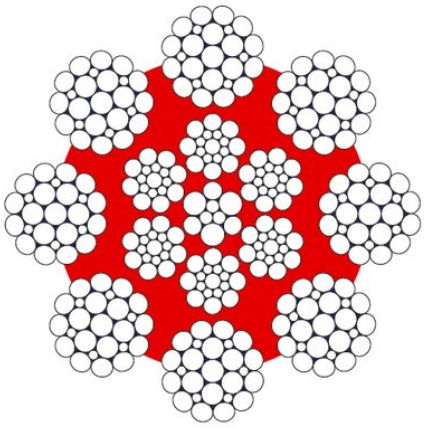

Overhead cranes



Tower crane



Container crane



Loading crane



Offshore crane





Applications: Very flexible Filler construction. Rope for a huge number of different applications, can be
used as hoisting rope in multiple part reeving for smaller lifting heights as well as for twin
hoist systems with left and right hand lay ropes for greater lifting heights.

Features:
-High breaking force
- Very stabile wire rope construction with good fatigue properties.
- A plastic layer between inner and outer strands protects against inner wear and protects the core from corrosion.

ISO 4309 Rope Category No: 8-72mm **RCN.06**

... *Read more*

Rope construction: 8 strand rope made out of conventional strands, plastic layer between the inner and outer strands.
Marking: According to standard
Standard: EN 12385-4

Fill factor: 0.62
RCN: 06
Tolerance Ø: +2% to +4%

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103100804070459	8	1,960	Bright	sZ	52.3	30.6	SupplierStandard	0.27
103100804270459	8	1,960	Galvanized	sZ	52.3	30.6	SupplierStandard	0.27
103100806070459	8	1,960	Bright	zZ	52.3	30.6	SupplierStandard	0.27
103100806270459	8	1,960	Galvanized	zZ	52.3	30.6	SupplierStandard	0.27
103100805070459	8	1,960	Bright	sS	52.3	30.6	SupplierStandard	0.27
103100805270459	8	1,960	Galvanized	sS	52.3	30.6	SupplierStandard	0.27
103100803070459	8	1,960	Bright	zS	52.3	30.6	SupplierStandard	0.27
103100803270459	8	1,960	Galvanized	zS	52.3	30.6	SupplierStandard	0.27
103100904070459	9	1,960	Bright	sZ	66.4	38.8	SupplierStandard	0.35
103100906070459	9	1,960	Bright	zZ	66.4	38.8	SupplierStandard	0.35
103100905070459	9	1,960	Bright	sS	66.4	38.8	SupplierStandard	0.35
103100903070459	9	1,960	Bright	zS	66.4	38.8	SupplierStandard	0.35
103100904270459	9	1,960	Galvanized	sZ	66.4	38.8	SupplierStandard	0.35
103100906270459	9	1,960	Galvanized	zZ	66.4	38.8	SupplierStandard	0.35
103100905270459	9	1,960	Galvanized	sS	66.4	38.8	SupplierStandard	0.35
103100903270459	9	1,960	Galvanized	zS	66.4	38.8	SupplierStandard	0.35
103101004070459	10	1,960	Bright	sZ	82	48.8	SupplierStandard	0.43
103101006070459	10	1,960	Bright	zZ	82	48.8	SupplierStandard	0.43
103101005070459	10	1,960	Bright	sS	82	48.8	SupplierStandard	0.43
103101003070459	10	1,960	Bright	zS	82	48.8	SupplierStandard	0.43
103101004270459	10	1,960	Galvanized	sZ	82	48.8	SupplierStandard	0.43
103101006270459	10	1,960	Galvanized	zZ	82	48.8	SupplierStandard	0.43
103101005270459	10	1,960	Galvanized	sS	82	48.8	SupplierStandard	0.43
103101003270459	10	1,960	Galvanized	zS	82	48.8	SupplierStandard	0.43
103101104070459	11	1,960	Bright	sZ	98	59.6	SupplierStandard	0.53
103101106070459	11	1,960	Bright	zZ	98	59.6	SupplierStandard	0.53
103101105070459	11	1,960	Bright	sS	98	59.6	SupplierStandard	0.53
103101103070459	11	1,960	Bright	zS	98	59.6	SupplierStandard	0.53
103101104270459	11	1,960	Galvanized	sZ	98	59.6	SupplierStandard	0.53
103101106270459	11	1,960	Galvanized	zZ	98	59.6	SupplierStandard	0.53
103101105270459	11	1,960	Galvanized	sS	98	59.6	SupplierStandard	0.53

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103101103270459	11	1,960	Galvanized	zS	98	59.6	SupplierStandard	0.53
103101204070459	12	1,960	Bright	sZ	118	68.3	SupplierStandard	0.61
103101206070459	12	1,960	Bright	zZ	118	68.3	SupplierStandard	0.61
103101205070459	12	1,960	Bright	sS	118	68.3	SupplierStandard	0.61
103101203070459	12	1,960	Bright	zS	118	68.3	SupplierStandard	0.61
103101204270459	12	1,960	Galvanized	sZ	118	68.3	SupplierStandard	0.61
103101206270459	12	1,960	Galvanized	zZ	118	68.3	SupplierStandard	0.61
103101205270459	12	1,960	Galvanized	sS	118	68.3	SupplierStandard	0.61
103101203270459	12	1,960	Galvanized	zS	118	68.3	SupplierStandard	0.61
103101274070459	12.7	1,960	Bright	sZ	132.2	78	SupplierStandard	0.69
103101276070459	12.7	1,960	Bright	zZ	132.2	78	SupplierStandard	0.69
103101275070459	12.7	1,960	Bright	sS	132.2	78	SupplierStandard	0.69
103101273070459	12.7	1,960	Bright	zS	132.2	78	SupplierStandard	0.69
103101274270459	12.7	1,960	Galvanized	sZ	132.2	78	SupplierStandard	0.69
103101276270459	12.7	1,960	Galvanized	zZ	132.2	78	SupplierStandard	0.69
103101275270459	12.7	1,960	Galvanized	sS	132.2	78	SupplierStandard	0.69
103101273270459	12.7	1,960	Galvanized	zS	132.2	78	SupplierStandard	0.69
103101304070459	13	1,960	Bright	sZ	138.9	81.7	SupplierStandard	0.73
103101306070459	13	1,960	Bright	zZ	138.9	81.7	SupplierStandard	0.73
103101305070459	13	1,960	Bright	sS	138.9	81.7	SupplierStandard	0.73
103101303070459	13	1,960	Bright	zS	138.9	81.7	SupplierStandard	0.73
103101304270459	13	1,960	Galvanized	sZ	138.9	81.7	SupplierStandard	0.73
103101306270459	13	1,960	Galvanized	zZ	138.9	81.7	SupplierStandard	0.73
103101305270459	13	1,960	Galvanized	sS	138.9	81.7	SupplierStandard	0.73
103101303270459	13	1,960	Galvanized	zS	138.9	81.7	SupplierStandard	0.73
103101404070459	14	1,960	Bright	sZ	160.1	95.1	SupplierStandard	0.85
103101406070459	14	1,960	Bright	zZ	160.1	95.1	SupplierStandard	0.85
103101405070459	14	1,960	Bright	sS	160.1	95.1	SupplierStandard	0.85
103101403070459	14	1,960	Bright	zS	160.1	95.1	SupplierStandard	0.85
103101404270459	14	1,960	Galvanized	sZ	160.1	95.1	SupplierStandard	0.85
103101406270459	14	1,960	Galvanized	zZ	160.1	95.1	SupplierStandard	0.85

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103101405270459	14	1,960	Galvanized	sS	160.1	95.1	SupplierStandard	0.85
103101403270459	14	1,960	Galvanized	zS	160.1	95.1	SupplierStandard	0.85
103101504070459	15	1,960	Bright	sZ	184.1	110.8	SupplierStandard	0.99
103101506070459	15	1,960	Bright	zZ	184.1	110.8	SupplierStandard	0.99
103101505070459	15	1,960	Bright	sS	184.1	110.8	SupplierStandard	0.99
103101503070459	15	1,960	Bright	zS	184.1	110.8	SupplierStandard	0.99
103101504270459	15	1,960	Galvanized	sZ	184.1	110.8	SupplierStandard	0.99
103101506270459	15	1,960	Galvanized	zZ	184.1	110.8	SupplierStandard	0.99
103101505270459	15	1,960	Galvanized	sS	184.1	110.8	SupplierStandard	0.99
103101503270459	15	1,960	Galvanized	zS	184.1	110.8	SupplierStandard	0.99
103101604070459	16	1,960	Bright	sZ	209.3	125.4	SupplierStandard	1.12
103101606070459	16	1,960	Bright	zZ	209.3	125.4	SupplierStandard	1.12
103101605070459	16	1,960	Bright	sS	209.3	125.4	SupplierStandard	1.12
103101603070459	16	1,960	Bright	zS	209.3	125.4	SupplierStandard	1.12
103101604270459	16	1,960	Galvanized	sZ	209.3	125.4	SupplierStandard	1.12
103101606270459	16	1,960	Galvanized	zZ	209.3	125.4	SupplierStandard	1.12
103101605270459	16	1,960	Galvanized	sS	209.3	125.4	SupplierStandard	1.12
103101603270459	16	1,960	Galvanized	zS	209.3	125.4	SupplierStandard	1.12
103101704070459	17	1,960	Bright	sZ	234.2	140.3	SupplierStandard	1.25
103101706070459	17	1,960	Bright	zZ	234.2	140.3	SupplierStandard	1.25
103101705070459	17	1,960	Bright	sS	234.2	140.3	SupplierStandard	1.25
103101703070459	17	1,960	Bright	zS	234.2	140.3	SupplierStandard	1.25
103101704270459	17	1,960	Galvanized	sZ	234.2	140.3	SupplierStandard	1.25
103101706270459	17	1,960	Galvanized	zZ	234.2	140.3	SupplierStandard	1.25
103101705270459	17	1,960	Galvanized	sS	234.2	140.3	SupplierStandard	1.25
103101703270459	17	1,960	Galvanized	zS	234.2	140.3	SupplierStandard	1.25
103101804070459	18	1,960	Bright	sZ	265.5	157.7	SupplierStandard	1.4
103101806070459	18	1,960	Bright	zZ	265.5	157.7	SupplierStandard	1.4
103101805070459	18	1,960	Bright	sS	265.5	157.7	SupplierStandard	1.4
103101803070459	18	1,960	Bright	zS	265.5	157.7	SupplierStandard	1.4
103101804270459	18	1,960	Galvanized	sZ	265.5	157.7	SupplierStandard	1.4

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103101806270459	18	1,960	Galvanized	zZ	265.5	157.7	SupplierStandard	1.4
103101805270459	18	1,960	Galvanized	sS	265.5	157.7	SupplierStandard	1.4
103101803270459	18	1,960	Galvanized	zS	265.5	157.7	SupplierStandard	1.4
103101904070459	19	1,960	Bright	sZ	292.9	178.6	SupplierStandard	1.59
103101906070459	19	1,960	Bright	zZ	292.9	178.6	SupplierStandard	1.59
103101905070459	19	1,960	Bright	sS	292.9	178.6	SupplierStandard	1.59
103101903070459	19	1,960	Bright	zS	292.9	178.6	SupplierStandard	1.59
103101904270459	19	1,960	Galvanized	sZ	292.9	178.6	SupplierStandard	1.59
103101906270459	19	1,960	Galvanized	zZ	292.9	178.6	SupplierStandard	1.59
103101905270459	19	1,960	Galvanized	sS	292.9	178.6	SupplierStandard	1.59
103101903270459	19	1,960	Galvanized	zS	292.9	178.6	SupplierStandard	1.59
103102004070459	20	1,960	Bright	sZ	327	198.2	SupplierStandard	1.76
103102006070459	20	1,960	Bright	zZ	327	198.2	SupplierStandard	1.76
103102005070459	20	1,960	Bright	sS	327	198.2	SupplierStandard	1.76
103102003070459	20	1,960	Bright	zS	327	198.2	SupplierStandard	1.76
103102004270459	20	1,960	Galvanized	sZ	327	198.2	SupplierStandard	1.76
103102006270459	20	1,960	Galvanized	zZ	327	198.2	SupplierStandard	1.76
103102005270459	20	1,960	Galvanized	sS	327	198.2	SupplierStandard	1.76
103102003270459	20	1,960	Galvanized	zS	327	198.2	SupplierStandard	1.76
103102104070459	21	1,960	Bright	sZ	359	217.1	SupplierStandard	1.93
103102106070459	21	1,960	Bright	zZ	359	217.1	SupplierStandard	1.93
103102105070459	21	1,960	Bright	sS	359	217.1	SupplierStandard	1.93
103102103070459	21	1,960	Bright	zS	359	217.1	SupplierStandard	1.93
103102104270459	21	1,960	Galvanized	sZ	359	217.1	SupplierStandard	1.93
103102106270459	21	1,960	Galvanized	zZ	359	217.1	SupplierStandard	1.93
103102105270459	21	1,960	Galvanized	sS	359	217.1	SupplierStandard	1.93
103102103270459	21	1,960	Galvanized	zS	359	217.1	SupplierStandard	1.93
103102204070459	22	1,960	Bright	sZ	394.5	254.4	SupplierStandard	2.18
103102206070459	22	1,960	Bright	zZ	394.5	254.4	SupplierStandard	2.18
103102205070459	22	1,960	Bright	sS	394.5	254.4	SupplierStandard	2.18
103102203070459	22	1,960	Bright	zS	394.5	254.4	SupplierStandard	2.18

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103102204270459	22	1,960	Galvanized	sZ	394.5	254.4	SupplierStandard	2.18
103102505270459	25	1,960	Galvanized	sS	514.2	302	SupplierStandard	2.69
103102503270459	25	1,960	Galvanized	zS	514.2	302	SupplierStandard	2.69
103102604070459	26	1,960	Bright	sZ	558.8	326.8	SupplierStandard	2.91
103102606070459	26	1,960	Bright	zZ	558.8	326.8	SupplierStandard	2.91
103102605070459	26	1,960	Bright	sS	558.8	326.8	SupplierStandard	2.91
103102603070459	26	1,960	Bright	zS	558.8	326.8	SupplierStandard	2.91
103102604270459	26	1,960	Galvanized	sZ	558.8	326.8	SupplierStandard	2.91
103102606270459	26	1,960	Galvanized	zZ	558.8	326.8	SupplierStandard	2.91
103102605270459	26	1,960	Galvanized	sS	558.8	326.8	SupplierStandard	2.91
103102603270459	26	1,960	Galvanized	zS	558.8	326.8	SupplierStandard	2.91
103102704070459	27	1,960	Bright	sZ	593.3	353.2	SupplierStandard	3.14
103102706070459	27	1,960	Bright	zZ	593.3	353.2	SupplierStandard	3.14
103102705070459	27	1,960	Bright	sS	593.3	353.2	SupplierStandard	3.14
103102703070459	27	1,960	Bright	zS	593.3	353.2	SupplierStandard	3.14
103102704270459	27	1,960	Galvanized	sZ	593.3	353.2	SupplierStandard	3.14
103102706270459	27	1,960	Galvanized	zZ	593.3	353.2	SupplierStandard	3.14
103102705270459	27	1,960	Galvanized	sS	593.3	353.2	SupplierStandard	3.14
103102703270459	27	1,960	Galvanized	zS	593.3	353.2	SupplierStandard	3.14
103102804070459	28	1,960	Bright	sZ	638	375.2	SupplierStandard	3.34
103102806070459	28	1,960	Bright	zZ	638	375.2	SupplierStandard	3.34
103102805070459	28	1,960	Bright	sS	638	375.2	SupplierStandard	3.34
103102803070459	28	1,960	Bright	zS	638	375.2	SupplierStandard	3.34
103102804270459	28	1,960	Galvanized	sZ	638	375.2	SupplierStandard	3.34
103102806270459	28	1,960	Galvanized	zZ	638	375.2	SupplierStandard	3.34
103102805270459	28	1,960	Galvanized	sS	638	375.2	SupplierStandard	3.34
103103204070459	32	1,960	Bright	sZ	837.9	495.4	SupplierStandard	4.41
103103206070459	32	1,960	Bright	zZ	837.9	495.4	SupplierStandard	4.41
103103205070459	32	1,960	Bright	sS	837.9	495.4	SupplierStandard	4.41
103103203070459	32	1,960	Bright	zS	837.9	495.4	SupplierStandard	4.41
103103204270459	32	1,960	Galvanized	sZ	837.9	495.4	SupplierStandard	4.41

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103103206270459	32	1,960	Galvanized	zZ	837.9	495.4	SupplierStandard	4.41
103103205270459	32	1,960	Galvanized	sS	837.9	495.4	SupplierStandard	4.41
103103203270459	32	1,960	Galvanized	zS	837.9	495.4	SupplierStandard	4.41
103103304070459	33	1,960	Bright	sZ	896.5	526.4	SupplierStandard	4.69
103103306070459	33	1,960	Bright	zZ	896.5	526.4	SupplierStandard	4.69
103103305070459	33	1,960	Bright	sS	896.5	526.4	SupplierStandard	4.69
103103303070459	33	1,960	Bright	zS	896.5	526.4	SupplierStandard	4.69
103103304270459	33	1,960	Galvanized	sZ	896.5	526.4	SupplierStandard	4.69
103103306270459	33	1,960	Galvanized	zZ	896.5	526.4	SupplierStandard	4.69
103103305270459	33	1,960	Galvanized	sS	896.5	526.4	SupplierStandard	4.69
103103303270459	33	1,960	Galvanized	zS	896.5	526.4	SupplierStandard	4.69
103103404070459	34	1,960	Bright	sZ	945.3	556.8	SupplierStandard	4.96
103103406070459	34	1,960	Bright	zZ	945.3	556.8	SupplierStandard	4.96
103103405070459	34	1,960	Bright	sS	945.3	556.8	SupplierStandard	4.96
103103403070459	34	1,960	Bright	zS	945.3	556.8	SupplierStandard	4.96
103103404270459	34	1,960	Galvanized	sZ	945.3	556.8	SupplierStandard	4.96
103103406270459	34	1,960	Galvanized	zZ	945.3	556.8	SupplierStandard	4.96
103103405270459	34	1,960	Galvanized	sS	945.3	556.8	SupplierStandard	4.96
103103403270459	34	1,960	Galvanized	zS	945.3	556.8	SupplierStandard	4.96
103103604070459	36	1,960	Bright	sZ	1,054.7	626.5	SupplierStandard	5.58
103103606070459	36	1,960	Bright	zZ	1,054.7	626.5	SupplierStandard	5.58
103103605070459	36	1,960	Bright	sS	1,054.7	626.5	SupplierStandard	5.58
103103603070459	36	1,960	Bright	zS	1,054.7	626.5	SupplierStandard	5.58
103103604270459	36	1,960	Galvanized	sZ	1,054.7	626.5	SupplierStandard	5.58
103103606270459	36	1,960	Galvanized	zZ	1,054.7	626.5	SupplierStandard	5.58
103103605270459	36	1,960	Galvanized	sS	1,054.7	626.5	SupplierStandard	5.58
103103603270459	36	1,960	Galvanized	zS	1,054.7	626.5	SupplierStandard	5.58
103103804070459	38	1,960	Bright	sZ	1,186	705.1	SupplierStandard	6.28
103103806070459	38	1,960	Bright	zZ	1,186	705.1	SupplierStandard	6.28
103103805070459	38	1,960	Bright	sS	1,186	705.1	SupplierStandard	6.28
103103803070459	38	1,960	Bright	zS	1,186	705.1	SupplierStandard	6.28

© November 2026 - All Rights Reserved

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103103804270459	38	1,960	Galvanized	sZ	1,186	705.1	SupplierStandard	6.28
103103806270459	38	1,960	Galvanized	zZ	1,186	705.1	SupplierStandard	6.28
103103805270459	38	1,960	Galvanized	sS	1,186	705.1	SupplierStandard	6.28
103103803270459	38	1,960	Galvanized	zS	1,186	705.1	SupplierStandard	6.28
103104004070459	40	1,960	Bright	sZ	1,307.9	770.1	SupplierStandard	6.85
103104006070459	40	1,960	Bright	zZ	1,307.9	770.1	SupplierStandard	6.85
103104005070459	40	1,960	Bright	sS	1,307.9	770.1	SupplierStandard	6.85
103104003070459	40	1,960	Bright	zS	1,307.9	770.1	SupplierStandard	6.85
103104004270459	40	1,960	Galvanized	sZ	1,307.9	770.1	SupplierStandard	6.85
103104006270459	40	1,960	Galvanized	zZ	1,307.9	770.1	SupplierStandard	6.85
103104005270459	40	1,960	Galvanized	sS	1,307.9	770.1	SupplierStandard	6.85
103104003270459	40	1,960	Galvanized	zS	1,307.9	770.1	SupplierStandard	6.85
103104204070459	42	1,960	Bright	sZ	1,448.9	859.3	SupplierStandard	7.65
103104206070459	42	1,960	Bright	zZ	1,448.9	859.3	SupplierStandard	7.65
103104803070459	48	1,960	Bright	zS	1,874.5	1,123.1	SupplierStandard	10
103104804270459	48	1,960	Galvanized	sZ	1,874.5	1,123.1	SupplierStandard	10
103104806270459	48	1,960	Galvanized	zZ	1,874.5	1,123.1	SupplierStandard	10
103104805270459	48	1,960	Galvanized	sS	1,874.5	1,123.1	SupplierStandard	10
103104803270459	48	1,960	Galvanized	zS	1,874.5	1,123.1	SupplierStandard	10
103105004070459	50	1,960	Bright	sZ	2,049.4	1,212.7	SupplierStandard	10.79
103105006070459	50	1,960	Bright	zZ	2,049.4	1,212.7	SupplierStandard	10.79
103105005070459	50	1,960	Bright	sS	2,049.4	1,212.7	SupplierStandard	10.79
103105003070459	50	1,960	Bright	zS	2,049.4	1,212.7	SupplierStandard	10.79
103105004270459	50	1,960	Galvanized	sZ	2,049.4	1,212.7	SupplierStandard	10.79
103105006270459	50	1,960	Galvanized	zZ	2,049.4	1,212.7	SupplierStandard	10.79
103105005270459	50	1,960	Galvanized	sS	2,049.4	1,212.7	SupplierStandard	10.79
103105003270459	50	1,960	Galvanized	zS	2,049.4	1,212.7	SupplierStandard	10.79
103105204070459	52	1,960	Bright	sZ	2,229.9	1,309.7	SupplierStandard	11.66
103105206070459	52	1,960	Bright	zZ	2,229.9	1,309.7	SupplierStandard	11.66
103105205070459	52	1,960	Bright	sS	2,229.9	1,309.7	SupplierStandard	11.66
103105203070459	52	1,960	Bright	zS	2,229.9	1,309.7	SupplierStandard	11.66

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103105204270459	52	1,960	Galvanized	sZ	2,229.9	1,309.7	SupplierStandard	11.66
103105206270459	52	1,960	Galvanized	zZ	2,229.9	1,309.7	SupplierStandard	11.66
103105205270459	52	1,960	Galvanized	sS	2,229.9	1,309.7	SupplierStandard	11.66
103105203270459	52	1,960	Galvanized	zS	2,229.9	1,309.7	SupplierStandard	11.66
103105404070459	54	1,960	Bright	sZ	2,408.8	1,410.5	SupplierStandard	12.55
103105406070459	54	1,960	Bright	zZ	2,408.8	1,410.5	SupplierStandard	12.55
103105405070459	54	1,960	Bright	sS	2,408.8	1,410.5	SupplierStandard	12.55
103105403070459	54	1,960	Bright	zS	2,408.8	1,410.5	SupplierStandard	12.55
103106006270459	60	1,960	Galvanized	zZ	2,902.9	1,730	SupplierStandard	15.4
103106005270459	60	1,960	Galvanized	sS	2,902.9	1,730	SupplierStandard	15.4
103106003270459	60	1,960	Galvanized	zS	2,902.9	1,730	SupplierStandard	15.4
103106204070459	62	1,960	Bright	sZ	3,118	1,847.2	SupplierStandard	16.44
103106206070459	62	1,960	Bright	zZ	3,118	1,847.2	SupplierStandard	16.44
103106205070459	62	1,960	Bright	sS	3,118	1,847.2	SupplierStandard	16.44
103106203070459	62	1,960	Bright	zS	3,118	1,847.2	SupplierStandard	16.44
103106204270459	62	1,960	Galvanized	sZ	3,118	1,847.2	SupplierStandard	16.44
103106206270459	62	1,960	Galvanized	zZ	3,118	1,847.2	SupplierStandard	16.44
103106205270459	62	1,960	Galvanized	sS	3,118	1,847.2	SupplierStandard	16.44
103106203270459	62	1,960	Galvanized	zS	3,118	1,847.2	SupplierStandard	16.44
103106404070459	64	1,960	Bright	sZ	3,322.1	1,968.3	SupplierStandard	17.52
103106406070459	64	1,960	Bright	zZ	3,322.1	1,968.3	SupplierStandard	17.52
103106405070459	64	1,960	Bright	sS	3,322.1	1,968.3	SupplierStandard	17.52
103106403070459	64	1,960	Bright	zS	3,322.1	1,968.3	SupplierStandard	17.52
103106404270459	64	1,960	Galvanized	sZ	3,322.1	1,968.3	SupplierStandard	17.52
103106406270459	64	1,960	Galvanized	zZ	3,322.1	1,968.3	SupplierStandard	17.52
103106405270459	64	1,960	Galvanized	sS	3,322.1	1,968.3	SupplierStandard	17.52
103106403270459	64	1,960	Galvanized	zS	3,322.1	1,968.3	SupplierStandard	17.52
103106604070459	66	1,960	Bright	sZ	3,541.6	2,093.3	SupplierStandard	18.63
103106606070459	66	1,960	Bright	zZ	3,541.6	2,093.3	SupplierStandard	18.63
103106605070459	66	1,960	Bright	sS	3,541.6	2,093.3	SupplierStandard	18.63
103106603070459	66	1,960	Bright	zS	3,541.6	2,093.3	SupplierStandard	18.63

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Stratoplast

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
103106604270459	66	1,960	Galvanized	sZ	3,541.6	2,093.3	SupplierStandard	18.63
103106606270459	66	1,960	Galvanized	zZ	3,541.6	2,093.3	SupplierStandard	18.63
103107203270459	72	1,960	Galvanized	zS	4,154.4	2,491.2	SupplierStandard	22.17

© November 2026 - All Rights Reserved