Lifting Solutions Group
Axel Johnson International

Container Lifting Beam Type C and D

Product information

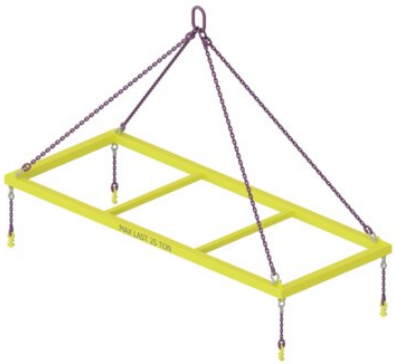

Lifting beam for handling standard 20-ft and 40-ft containers. Supplied complete with wire rope or chain slings, type CLB-32 or CLB-40 container hooks for attachment to container bottom fixings and type CLT for top fixings.

Design: The type C frame beam is designed for lifting from the bottom fixings. The type D frame beam is designed for lifting from the top fixings.

Proof load: 2 x WLL

Type C Frame beam - bottom lift.
Type D Frame beam - top lift.

... *Read more*

Material: Hollow-beam and plate of high-strength structural steel.
Marking: According to standard, CE-mark, Maximum load
Finish: Yellow painted.
Standard: EN 13155
Note: Manufactured in accordance with the international standard ISO 3874, which states that a lifting beam is required when handling loaded standard containers larger than 10 ft in

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Container Lifting Beam Type C and D

Blueprint



Technical data

Part code	Code	WLL ton	Type	For container size (ft)	B mm	H mm	K mm	L mm	Weight kg
62056692D240	6692D-240	24	1C-1CC	20	2,260	3,600	1,100	5,850	690
62056692C240	6692C-240	24	1C-1CC	20	2,550	3,650	3,400	5,850	720
62056694D360	6694D-360	36	1A-1AAA	40	2,260	6,500	1,300	11,985	2,350
62056694C360	6694C-360	36	1A-1AAA	40	2,550	6,500	3,800	11,985	2,400

© November 2026 - All Rights Reserved