Lifting Solutions Group
Axel Johnson International

Geared Trolley POWERTEX PGT-S1

Product information



POWERTEX geared trolley operated by the chain. A compact and low built design with low dead weight in solid steel construction. It includes mechanical stops to ensure that the trolley is kept on the beam in case of an accident (anti-drop + anti-tilt). Fits most types of beam profiles and most brands of lifting blocks and electric hoists. Wheels with ball bearings.
Supplied with the grey label for adhering over white nameplate for use in the entertainment industry.
Static test coefficient: WLL x 1,5.

... *Read more*

Marking: According to standard, WLL, CE and individual serial number.
Finish: Black painted.
Standard: EN 13157
Note: Working handchain length is 3m as standard. Available in other lengths.


Safety factor: 4:1

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Geared Trolley POWERTEX PGT-S1

Blueprint

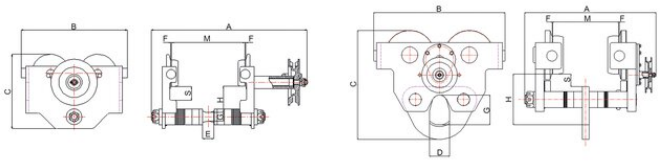

Technical data

Part code	WLL ton	Beam width mm	Wheel Ø outside/inside	Minimum radius mm	Weight kg
502600101880040	1	66-188	96,2/68	1,000	15
502600202000040	2	88-200	108,2/80	1,100	22
502600302050040	3	100-205	131,3/100	1,300	34
502600502120040	5	114-212	143,7/110	1,400	49

© November 2026 - All Rights Reserved