


Kaevurõnga haaratsid

Tootekirjeldus

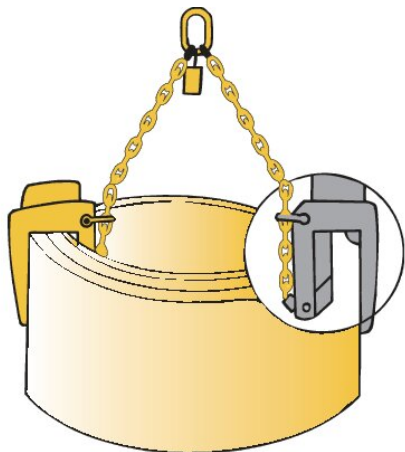

General: We manufacture two standard sizes of well-ring lifters for lifting and handling of concrete well rings. These have a grab width of 60–120 mm and 100–200 mm, respectively, which cater for the standard well sizes that exist on the market. High friction teeth helps to prevent sliding on ice or mud. Both sizes are available with two or three grabs.

Supplied complete with chain sling, 1,5m chain per leg. If large well rings are to be handled, they will balance better if three grabs are used. Designed for well ring diameters 60 - 180 cm. Handle for easy attach and release.

... [Read more](#)

Kaevurõnga haaratsid

Tehnilised andmed

Tootekood	WLL tonn	Efektivne tööpikkus m	Jaw width mm	haaratsite arv
655600201200010	2	1,6	60-120	2
655600202000010	2	1,8	100-200	2
655600301200010	3	-	60-120	3
655600302000010	3	-	100-200	3