



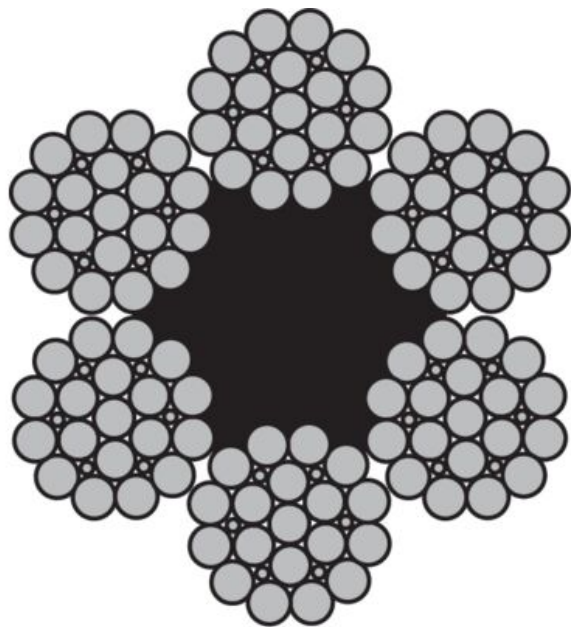

Lifitross



Lifitross 6x19S-FC

Tootekirjeldus



Tüüpiline kasutus: Liftid.

Trossi konstruktsioon: 6x19F-FC.

Märgistus: Vastavalt standardile

Pinnakate: Kirgas (määrdes).

Standard: EN 12385-5

Täitefaktor: 0.49

Tootekood	Trossi Ø mm	Terase ristlõike pindala mm²	Min katkekoormus kN 1370/1770 N/mm²	Kaal kg/100m
106100604130069	6	13,8	17.8	13
106100654130069	6,5	16,2	20.9	15
106100704130069	7	18,8	24.3	18
106100804130069	8	24,6	31.7	23
106100904130069	9	31,1	40.1	29
106101004130069	10	38,4	49.5	36
106101104130069	11	46,5	59.9	43
106101204130069	12	55,3	71.3	52
106101304130069	13	64,9	83.7	61
106101404130069	14	75,3	97	70
106101504130069	15	86,4	111	81
106101604130069	16	98,3	127	92
106101904130069	19	139	179	130
106102204130069	22	186	240	174