


## Teraströss HD9K

### Tootekirjeldus

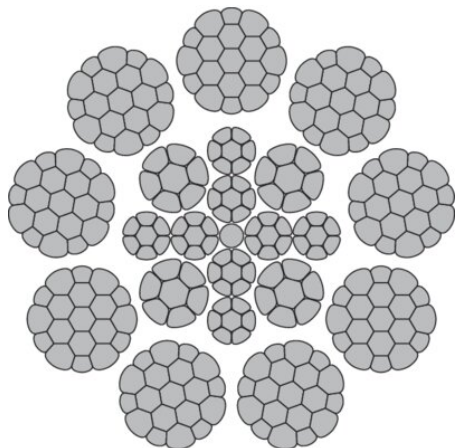

**Typical applications:** When an extremely high MBL is required for a multipart reeving hoist system: boom hoist, trolley for container cranes, luffing for mobile and crawler cranes and big height overhead cranes and electric hoists with a minimum of 2 or 3 falls.

Is available also with plastic core (PI). A plastic layer between the steel core and the outer strands, gives the rope a high structural stability, avoiding internal rope destruction and protecting the core against corrosive environment. Recommended for all marine and offshore applications and other severe working environmental conditions.


**Standard:** EN 12385-4

**ISO 4309 Rope Category No:** 9x16 RCN.06, 9x19 RCN.07, 9x26 RCN 10 [... Read more](#)

Vintsitross



Sildkraanad



Tornkraanad



Konteinerkraanad



Mobile port crane



Offshore crane



Laadurkraanad



Sõrestik-kraanad



**Täitefaktor:** 0.7  
**RCN:** 06

## Teraströss HD9K

### Tehnilised andmed

Tootekood	Trossi Ø mm	Materjali tõmbetugevus N/mm <sup>2</sup>	Pinnakate	Rope lay	Min katkekoormus kN	Terase ristlõike pindala mm <sup>2</sup>	Määrdes/Kuiv	Kaal kg/100m
103100904270059	9	1 960	Tsingitud	sZ	75,7	44,8	SupplierStandard	39
103100903270059	9	1 960	Tsingitud	zS	75,7	44,8	SupplierStandard	39
103100904300059	9	2 160	Tsingitud	sZ	80,4	44,8	SupplierStandard	39
103100903300059	9	2 160	Tsingitud	zS	80,4	44,8	SupplierStandard	39
103101004270059	10	1 960	Tsingitud	sZ	93	55,1	SupplierStandard	48
103101003270059	10	1 960	Tsingitud	zS	93	55,1	SupplierStandard	48
103101004300059	10	2 160	Tsingitud	sZ	98,8	55,1	SupplierStandard	48
103101003300059	10	2 160	Tsingitud	zS	98,8	55,1	SupplierStandard	48
103101104270059	11	1 960	Tsingitud	sZ	112	66,7	SupplierStandard	58
103101103270059	11	1 960	Tsingitud	zS	112	66,7	SupplierStandard	58
103101104300059	11	2 160	Tsingitud	sZ	120	66,7	SupplierStandard	58
103101103300059	11	2 160	Tsingitud	zS	120	66,7	SupplierStandard	58
103101204270059	12	1 960	Tsingitud	sZ	134	79	SupplierStandard	68
103101203270059	12	1 960	Tsingitud	zS	134	79	SupplierStandard	68
103101204300059	12	2 160	Tsingitud	sZ	142	79	SupplierStandard	68
103101203300059	12	2 160	Tsingitud	zS	142	79	SupplierStandard	68
103101304270059	13	1 960	Tsingitud	sZ	158	93,7	SupplierStandard	81
103101303270059	13	1 960	Tsingitud	zS	158	93,7	SupplierStandard	81
103101304300059	13	2 160	Tsingitud	sZ	168	93,7	SupplierStandard	81
103101303300059	13	2 160	Tsingitud	zS	168	93,7	SupplierStandard	81
103101404270059	14	1 960	Tsingitud	sZ	181	107	SupplierStandard	93
103101403270059	14	1 960	Tsingitud	zS	181	107	SupplierStandard	93
103101404300059	14	2 160	Tsingitud	sZ	192	107	SupplierStandard	93
103101403300059	14	2 160	Tsingitud	zS	192	107	SupplierStandard	93
103101504270059	15	1 960	Tsingitud	sZ	210	124	SupplierStandard	107
103101503270059	15	1 960	Tsingitud	zS	210	124	SupplierStandard	107
103101504300059	15	2 160	Tsingitud	sZ	223	124	SupplierStandard	107
103101503300059	15	2 160	Tsingitud	zS	223	124	SupplierStandard	107
103101604270059	16	1 960	Tsingitud	sZ	240	142	SupplierStandard	123
103101603270059	16	1 960	Tsingitud	zS	240	142	SupplierStandard	123
103101604300059	16	2 160	Tsingitud	sZ	255	142	SupplierStandard	123

## Teraströss HD9K

### Tehnilised andmed

Tootekood	Trossi Ø mm	Materjali tõmbetugevus N/mm <sup>2</sup>	Pinnakate	Rope lay	Min katkekoormus kN	Terase ristlõike pindala mm <sup>2</sup>	Määrdes/Kuiv	Kaal kg/100m
103101603300059	16	2 160	Tsingitud	zS	255	142	SupplierStandard	123
103101804270059	18	1 960	Tsingitud	sZ	302	179	SupplierStandard	154
103101803270059	18	1 960	Tsingitud	zS	302	179	SupplierStandard	154
103101804300059	18	2 160	Tsingitud	sZ	321	179	SupplierStandard	154
103101803300059	18	2 160	Tsingitud	zS	321	179	SupplierStandard	154
103101904270059	19	1 960	Tsingitud	sZ	337	200	SupplierStandard	172
103101903270059	19	1 960	Tsingitud	zS	337	200	SupplierStandard	172
103101904300059	19	2 160	Tsingitud	sZ	358	200	SupplierStandard	172
103101903300059	19	2 160	Tsingitud	zS	358	200	SupplierStandard	172
103102004270059	20	1 960	Tsingitud	sZ	367	217	SupplierStandard	187
103102003270059	20	1 960	Tsingitud	zS	367	217	SupplierStandard	187
103102004300059	20	2 160	Tsingitud	sZ	389	217	SupplierStandard	187
103102003300059	20	2 160	Tsingitud	zS	389	217	SupplierStandard	187
103102204270059	22	1 960	Tsingitud	sZ	448	266	SupplierStandard	229
103102203270059	22	1 960	Tsingitud	zS	448	266	SupplierStandard	229
103102204300059	22	2 160	Tsingitud	sZ	476	266	SupplierStandard	229
103102203300059	22	2 160	Tsingitud	zS	476	266	SupplierStandard	229
103102404270059	24	1 960	Tsingitud	sZ	529	314	SupplierStandard	271
103102403270059	24	1 960	Tsingitud	zS	529	314	SupplierStandard	271
103102404300059	24	2 160	Tsingitud	sZ	562	314	SupplierStandard	271
103102403300059	24	2 160	Tsingitud	zS	562	314	SupplierStandard	271
103102504270059	25	1 960	Tsingitud	sZ	578	342	SupplierStandard	295
103102503270059	25	1 960	Tsingitud	zS	578	342	SupplierStandard	295
103102504300059	25	2 160	Tsingitud	sZ	614	342	SupplierStandard	295
103102503300059	25	2 160	Tsingitud	zS	614	342	SupplierStandard	295
103102604270059	26	1 960	Tsingitud	sZ	635	376	SupplierStandard	324
103102603270059	26	1 960	Tsingitud	zS	635	376	SupplierStandard	324
103102604300059	26	2 160	Tsingitud	sZ	674	376	SupplierStandard	324
103102603300059	26	2 160	Tsingitud	zS	674	376	SupplierStandard	324
103102804270059	28	1 960	Tsingitud	sZ	722	428	SupplierStandard	369
103102803270059	28	1 960	Tsingitud	zS	722	428	SupplierStandard	369

## Teraströss HD9K

### Tehnilised andmed

Tootekood	Trossi Ø mm	Materjali tõmbetugevus N/mm <sup>2</sup>	Pinnakate	Rope lay	Min katkekoormus kN	Terase ristlõike pindala mm <sup>2</sup>	Määrdes/Kuiv	Kaal kg/100m
103102804300059	28	2 160	Tsingitud	sZ	767	428	SupplierStandard	369
103102803300059	28	2 160	Tsingitud	zS	767	428	SupplierStandard	369
103103004270059	30	1 960	Tsingitud	sZ	826	489	SupplierStandard	422
103103003270059	30	1 960	Tsingitud	zS	826	489	SupplierStandard	422
103103004300059	30	2 160	Tsingitud	sZ	877	489	SupplierStandard	422
103103003300059	30	2 160	Tsingitud	zS	877	489	SupplierStandard	422
103103204270059	32	1 960	Tsingitud	sZ	945	560	SupplierStandard	483
103103203270059	32	1 960	Tsingitud	zS	945	560	SupplierStandard	483
103103204300059	32	2 160	Tsingitud	sZ	1 003	560	SupplierStandard	483
103103203300059	32	2 160	Tsingitud	zS	1 003	560	SupplierStandard	483
103103404270059	34	1 960	Tsingitud	sZ	1 061	629	SupplierStandard	542
103103403270059	34	1 960	Tsingitud	zS	1 061	629	SupplierStandard	542
103103404300059	34	2 160	Tsingitud	sZ	1 128	629	SupplierStandard	542
103103403300059	34	2 160	Tsingitud	zS	1 128	629	SupplierStandard	542
103103504270059	35	1 960	Tsingitud	sZ	1 127	668	SupplierStandard	576
103103503270059	35	1 960	Tsingitud	zS	1 127	668	SupplierStandard	576
103103504300059	35	2 160	Tsingitud	sZ	1 197	668	SupplierStandard	576
103103503300059	35	2 160	Tsingitud	zS	1 197	668	SupplierStandard	576